

A. Please install GPC support bar assembly on the ceiling

1. Fix the base on the ceiling or concrete (please ensure that the load is 40kg at least). Figure 6
2. Open the back ornament board ③ b, and loosen the screws of subsidiary arm④ . Please adjust the subsidiary arm④ to your desired position (this function is only for B200、B300), and then fasten the screws again. Please hide the power line into the gap and close the back ornament board③ b. Figure 7 and Figure8.




Figure 6




Figure 7




Figure 8

B. Please connect the GPC support bar assembly and GPM projector fixation

1. For installing the completed low bracket⑧ to the top bracket⑦ that push up the completed low bracket until it is fixed with the security lock⑨ and fasten the screws, refer to figure9 and figure 10.
2. Please ensure the GPC projector fixation is fastened.
3. Connection of power cord to projector.
4. Install the back ornament board.




Figure 9




Figure 10

C. Adjust your desired angle.

1. Loosen the screws of GPC support bar assembly⑥ via the spanned; adjust the projector to your desired position and fasten it. Figure 11
2. The direction of projector can be adjusted by forward 30° and backward 3° . Left and right adjustment is 3° .

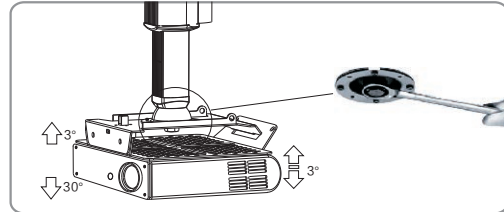


Figure 11

Installation for multifunctional arm (optional accessories)

1. Install the multifunctional arm⑩ on the projector. Figure 12
2. Adjust the fixer⑩ a of multifunctional arm for aligning the install hole of low bracket, and then fasten the screws. Figure 13
3. Install ornament board⑩ b for multifunctional arm.




Figure 12




Figure 13

Grandview


Instruction Manual

Projector Lift GPCM-C

Applicable Model: GPCM-C Series

Please read before using

Thank you for purchasing our products. Please read the instruction manual carefully in order to ensure this projector lift is suitable for your projection equipment.

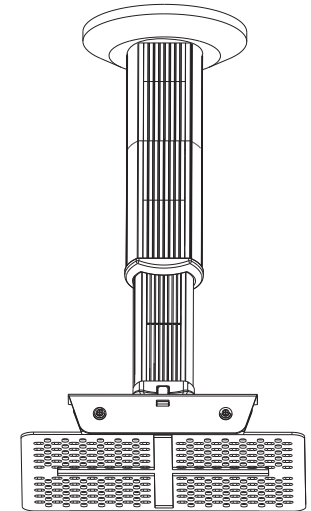

Cautious



Warnings

This instruction manual is written for dealers and technicians.

The customer must employ the technicians for installation. Please process the construction following this instruction manual to avoid injury caused by accidents.

For safety, the minimum load of ceiling must be 40KG



Caution

Please do not incline the projector the extremely.



Do not take apart

Please do not take apart the accessories of projector lift.

Grandview Crystal Screen Canada Ltd.

#11- 3751 North Fraser Way,
Marine Way Business Centre,
Burnaby, BC, Canada V5J 5G4
Tel: 1-604-412-9777 Fax: 1-604-412-9796
Website: www.grandviewscreen.ca

Guangzhou Grandview Crystal Screen Co., Ltd.

No.43,Guomao Road South, Hualong Town,
Panyu District, Guangzhou City, China
Tel: +8620-8489-9499 Fax: +8620-8480-3343
Website: www.grandviewscreen.com
www.grandviewscreen.com.cn

Diagram for applicable projector area

This projector lift must be installed above the bottom of projector (length 205mm; width 160mm). Figure 1. Multifunctional arm is available for this projector lift and applicable projector area will be increased (length 255mm; width 205mm)




Figure 1






Figure 2

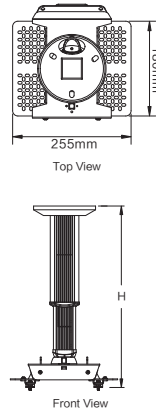


Components and Accessories

GPCM-B is combined by GPC and GPM .



GPM



GPC

Specifications

Unit(mm)

Model	GPCM-C	
Adjust distance for each grid	/	16
Load	25kg	

Optional Accessories

(Support Bar, Multifunctional Arm)

Unit(mm)

Product Name	Specifications
The length of support bar	400/600/800
Specification for Multifunctional Arm	30x355/30x295

Parts:

- ① Base (1pc)
- ② Ornament Cover (1pc)
- ③ Main Bar (1pc)
- ③a Front Ornament Board
- ③b Back Ornament Board
- ④ Subsidiary Bar(1pc)
- ④a Ornament board for subsidiary bar
- ⑤ Half-Cycle Junction (1pc)
- ⑤b Glider (1pc)
- ⑥ Main Screw (1pc)
- ⑦ Top Bracket (1pc)
- ⑧ Low Bracket (1pc)
- ⑨ Security Lock (1pcs)

Optional Accessories:

- Multifunctional Arm
- ⑩ Multifunctional Arm (2pcs)
- ⑩a Fixer (2pcs)
- ⑩b Ornament Board (8pcs)

Accessories


- M4x10 Pressing Screw (4pcs)
- M4x5 Pressing Screw (2pcs)
- M4x5 Positioning Screw (2pcs)
- M3x10 Cross Machine Screw(4pcs)
- M4x10 Cross Machine Screw(4pcs)
- M5x10 Cross Machine Screw(8pcs)
- M5x30 Cross Machine Screw(4pcs)
- M3x20 Cross Machine Screw(4pcs)
- M4x20 Cross Machine Screw(4pcs)
- M5x20 Cross Machine Screw(4pcs)
- M3x30 Cross Machine Screw(4pcs)
- M4x30 Cross Machine Screw(4pcs)
- M5 Drop In Anchors(3 sets)
- ∅ 16x10 Rubber Insert(4pcs)
- ∅ Washer(4pcs)
- ∅ Spring Washer(4pcs)
- Spanner (1pc)

GPC

Assembly

The main bar③ and the subsidiary bar④ are fixed together from factory. Loosen the screens of main bar③ and subsidiary bar④ . The distance between projector and ceiling can be adjusted according to the distance of install holes between main bar③ and subsidiary bar④ . Please refer to H in specification table.

(Note: GPCM-C100 is no subsidiary bar and no stretch function).



GPM

Assembly

- 1.GPM is combined by top bracket⑦ and low bracket⑧ . Press the release button for separating the top bracket and low bracket.
2. There are special security holes for avoiding the falling of projector (cooperate with security steel wire).

Usage

1. Press the release button for separating the top bracket⑦ and low bracket⑧ , refer to figure 3 and figure 4. Then, adjust the half-cycle junction⑤ and ensure that the groove of half-cycle junction to be align the direction of security lock⑨ , and then put it on the subsidiary bar after assembling. Finally, the glider is installed on the half-cycle junction for fastening the main bar⑥ as the figure.
2. Connect the projector and low bracket. Figure 5





Figure 3




Figure 4






Figure 5


Three steps for installation



A. Please install GPC support bar assembly on the ceiling



B. Please connect the GPC support bar assembly and GPM projector fixation



C. Adjust your desired angle.