

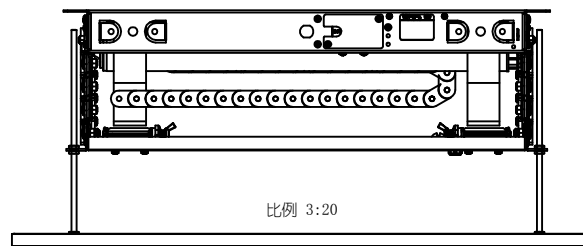
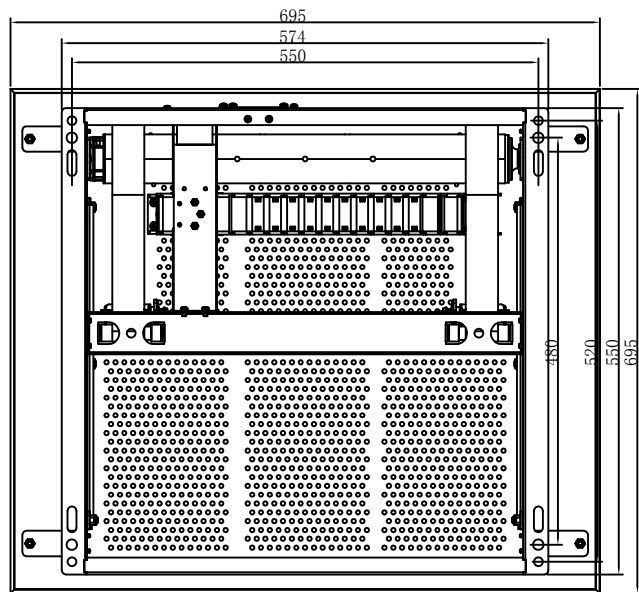
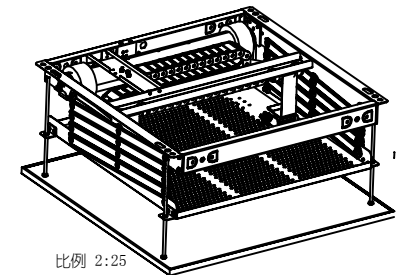
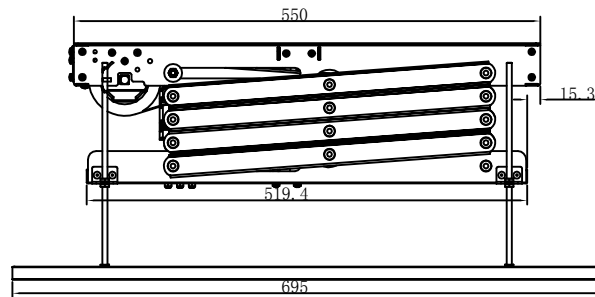


公差表	精加工	一般加工	粗加工
0	±0.10	±0.4	±1
0.0	±0.06	±0.2	±0.5
0.00	±0.02	±0.1	±0.25

版本/版次	版本更改内容	签名	日期
A/0	首次发行		

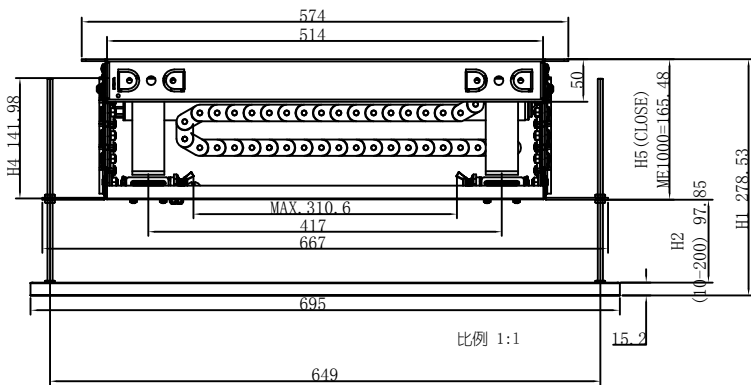

Model	Distance	H1	H5	H4	Max. Load	Max. projector size allowed	
ME500P	500mm	135	110	75	25KG	Upside installed W300 x D340 x H4 or W460 x D240 x H4	Reverse installed W600 x D600 x H240;
ME1000P	1000mm	190	165	130	25KG		
ME2000P	2000mm	300	275	240	25KG		
ME3000P	3000mm	410	385	350	25KG		

H1 is calculated from the smallest H2 (H2 =10mm).
If the projector height is > 200mm, the 4 bars can be replaced with longer bars to achieve more height.

设计		广州美视晶莹银幕有限公司		开发部		
制图	杰	图号		模号:		
校对		名称	GPCK-ME(XXX)P	材料	比例	重量
审批		产品		单位: mm	第 1 页 / 共 1 页	
视角		K3代码:		Tel: 020-84899499 Fax: 020-84805299 广州番禺区化龙镇国贸大道南43号领越科技园		