




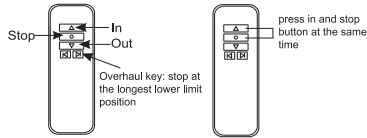


Remote Control Learning And Functions

Remote control keys function

1.  : In
2.  : Stop
3.  : Out
4.  : Empty
5.  : Overhaul Key



6. Reset: press and hold the remote control in and out keys at the same time until the buzzer sounds.

Remote control learning

Within 10 seconds of plugging in the power of the platform, simultaneously press and hold the "in" and "Stop" buttons of the remote control for 2-3S, the platform will move back and forth once, indicating that the remote control is successfully paired.


Note: When leaving the factory, the remote control has already paired, no need to learn to pair again

Limit Setting

Method for setting electronic limit of the platform

Electronic lower limit:

- 1/Use a needle to press the limit switch on the back of the remote control, and the indicator light will be on at this time;
- 2/press the remote control "out button" again, the platform will run outwards, and when it reaches the position you want, Press the "stop button".
- 3/ Use the needle to press the limit switch on the back of the remote control again. At this time, the indicator light is off, the platform will move back and forth once, and the lower limit setting is successful.



Electronic upper limit:

- 1/Use the needle to press the limit switch on the back of the remote control, and the indicator light will be on;
- 2/ press the remote control "in" button, the platform is folded inward, and when it is folded to the position you need, press "stop button",
- 3/ Use a needle to press the limit switch on the back of the remote control again. At this time, the indicator light is off, and the platform will move back and forth once, and the upper limit setting is successful.

Guangzhou Grandview Crystal Screen Co.,Ltd.
Guangzhou Grandview Creative Technology Co., Ltd.
No.43,Guomao Road South , Hualong Town,Panyu District ,
Guangzhou City ,GuangDong Province,China.
<http://www.grandviewscreen.com>
Tel:(86)-20-84899499

Grandview


Grandview

Instruction Manual

Laser projector intelligent telescopic platform

Applicable model: GMPU series

Thank you for purchasing Grandview products, please read the manual carefully before use



Note

- When the projector is turned on, do not look directly at the projector lens to avoid the strong light from hurting your eyes.
- The L-shaped connection fixing plate of the platform needs to be fixed.
- The platform cannot be pressed to the wire during movement and contraction.
- In the event of a sudden power failure during use, please reset the platform once before using it again, otherwise, precise positioning will not be possible.

Disassembly prohibit

Please do not disassemble or disassemble equipment parts.

Product Introduction



The laser projector intelligent telescopic platform is used in home broadcasting of film and television programs and entertainment, which will bring you a brand-new and intelligent new feeling in the experience of technology. When you turn on the projector, the platform automatically turns on with the projector.

The platform of GMPU series is driven by a motor to drive a rack and double slide rails to move in parallel. Through optocoupler counting, precise positioning can be achieved. The internal mechanical structure is extremely precise, the operation is precise, the appearance is simple, and it is safe and durable. The casing and the home color are versatile.

Features

- Easy to use, plug and play.
- Product design is exquisite and can be flexibly placed.
- There are two sets of mechanical limit switches and electronic limit switches inside the equipment.
- The equipment is equipped with 868 remote control function and transformer trigger function.

Specifications




Product name:
Laser projector intelligent telescopic platform GMPU-T1
product size: 584×362×67mm
Maximum stroke: 260mm
Maximum load: 20kg
Input voltage: AC220V 50Hz
Power: 20W
Control method: wireless remote control, transformer trigger


GMPU-T1 Component

Laser Projector Intelligent Telescopic Platform


- ① Casing
- ② Stepping Switch (Retract)
- ③ Stepping Switch (Expand)
- ④ Power function indicator light
- ⑤ Travel Limit Adjustment— UP Limit button
(Long press the button, program settlement with twice buzzer sound effect, program clearance with four times buzzer sound effect.)
- ⑥ Travel Limit Adjustment— Down Limit button
(Long press the button, program settlement with twice buzzer sound effect, program clearance with four times buzzer sound effect.)
- ⑦ DC5-12V Output
- ⑧ DC5-12V Input
- ⑨ Power socket
- ⑩ cable clip



Platform Backside

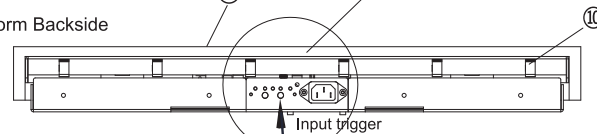

Projector Backside



Use a trigger cable to connect the platform with the projector's USB port to achieve intelligent linkage (when the projector is turned on/off, the platform will turned on/off synchronously)

Accessories

User Manual	1pcs	remote control	1pcs
Certificate	1pcs	M5x35mm tapping screw	4pcs
power cable	1pcs	M4 screw	4pcs
Expansive rubber	4pcs		